

# Aluminum Ladders

## SERIES 1200

### HOUSEHOLD ALUMINUM EXTENSION

Approved Grade 3 - 200 lbs Load Rating  
Meets or exceeds ANSI Type 3 - 200 lbs Load Rating

#### LIGHT WEIGHT PORTABILITY FOR EASY HOME USE

- Sturdy extruded "C" channel side rails
- Heavy duty serrated rungs
- ABS cyclocac, high impact, non marring end caps
- Heavy duty swivel shoes with cross ribbed rubber sole
- Heavy duty die cast rung locks

Part No.	Size	Maximum Extended Length	Base Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	
1216	16'	13'	15 1/4"	13 3/8"	14 1/4"	12 3/8"	18
1220	20'	17'	15 1/4"	13 3/8"	14 1/4"	12 3/8"	22
1224	24'	21'	15 1/4"	13 3/8"	14 1/4"	12 3/8"	26

## SERIES 2200

### MEDIUM DUTY ALUMINUM EXTENSION

Approved Grade 2 - 225 lbs Load Rating  
Meets or exceeds ANSI Type 2 - 225 lbs Load Rating

#### THE FINEST TRADESMAN EXTENSION ON THE MARKET

- Sturdy extruded "C" channel side rails
- Heavy duty "D" shape serrated rungs
- ABS cyclocac, high impact, non marring end caps
- Heavy duty swivel shoes c/w ice pick
- Heavy duty die cast rung locks
- Optional skid resistant wheels make it easier to raise and lower the ladder  
Wheels also prevent wall marking

Part No.	Size	Maximum Extended Length	Base Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	
2216	16'	13'	15 1/4"	13 3/8"	14 3/8"	12 1/2"	20
2220	20'	17'	15 1/4"	13 3/8"	14 3/8"	12 1/2"	24
2224	24'	21'	15 1/4"	13 3/8"	14 3/8"	12 1/2"	32
2228	28'	25'	15 1/4"	13 3/8"	14 3/8"	12 1/2"	40
2232	32'	29'	17 3/16"	15 1/4"	16 3/8"	14 3/8"	48
2236	36'	32'	17 3/16"	15 1/4"	16 3/8"	14 3/8"	61
2240	40'	36'	17 3/16"	15 1/4"	16 3/8"	14 3/8"	68

## SERIES 3200 & 3200D

### EXTRA-HEAVY DUTY ALUMINUM EXTENSION

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1A - 300 lbs Load Rating

- Heavy duty "I" beam construction, 3 1/16" x 1 1/4" rails provide stability, torque resistance and high strength to weight ratio
- Heavy duty serrated rungs prevent slipping for safe and sure climbing
- Yellow ABS cyclocac, high impact, non marring end caps
- Heavy duty spring-loaded die cast rung locks
- Heavy duty swivel feet c/w cog wheel

#### TWO SECTION EXTENSION - ROUND RUNG

Part No.	Size	Maximum Extended Length	Base Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	
3216	16'	13'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	29
3220	20'	17'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	34
3224	24'	21'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	41
3228	28'	25'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	50
3232	32'	29'	17 3/4"	15 1/4"	16 1/4"	13 5/8"	57
3236	36'	32'	17 3/4"	15 1/4"	16 1/4"	13 5/8"	66
3240	40'	35'	17 3/4"	15 1/4"	16 1/4"	13 5/8"	73

#### TWO SECTION EXTENSION - D RUNG

Part No.	Size	Maximum Extended Length	Base Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	
3216D	16'	13'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	31
3220D	20'	17'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	36
3224D	24'	21'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	43
3228D	28'	25'	17 5/8"	15 1/8"	16 1/4"	13 5/8"	53
3232D	32'	29'	17 3/4"	15 1/4"	16 1/4"	13 5/8"	60
3236D	36'	32'	17 3/4"	15 1/4"	16 1/4"	13 5/8"	69
3240D	40'	35'	17 3/4"	15 1/4"	16 1/4"	13 5/8"	77

## SERIES 4100, 4200, 4200D & 4300

### EXTRA-HEAVY DUTY ALUMINUM EXTENSION & STRAIGHT

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1A - 300 lbs Load Rating



#### OUR SIGNATURE PRODUCT - POSSIBLY THE BEST DESIGNED AND MANUFACTURED LADDER IN THE WORLD !

- Rigid "Box-Section" side rails, unequalled for strength and durability

#### • Side rails:

- 2 7/8" x 7/8" - 4100's up to 20'
- 4200 's up to 32'
- 4200D 's up to 28'
- 3 1/4" x 1" - all other sizes

- Side-mounted rope pulley and slide guide system keeps rope clear of climber's feet and allows effortless raising and lowering of fly section
- Impact-resistant yellow ABS cyclocac end caps
- Heavy duty zinc die cast rung locks
- Cross ribbed rubber safety shoes c/w ice pick

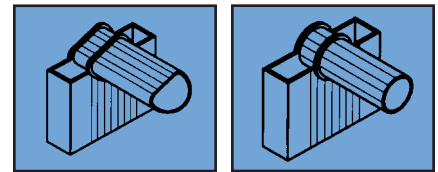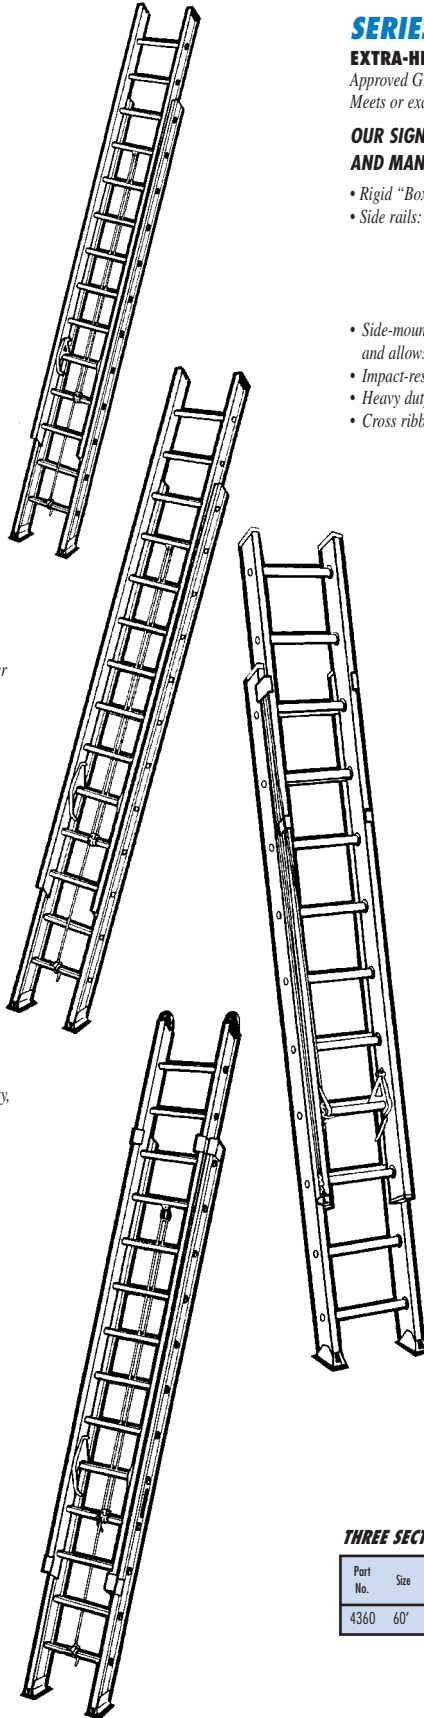

#### STRAIGHT - ROUND RUNG

Part No.	Size	Outside Width	Inside Width	Approx. Weight (lbs)
4108	8'	14 5/8"	12 7/8"	13
4110	10'	14 5/8"	12 7/8"	16
4112	12'	14 5/8"	12 7/8"	19
4114	14'	14 5/8"	12 7/8"	22
4116	16'	14 5/8"	12 7/8"	25
4118	18'	14 5/8"	12 7/8"	28
4120	20'	14 5/8"	12 7/8"	31
4122	22'	15 7/8"	14"	41
4124	24'	15 7/8"	14"	44

#### TWO SECTION EXTENSION - D RUNG

Part No.	Size	Maximum Extended Length	Base Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	
4216D	16'	13'	17"	15 1/4"	14 3/4"	13 1/16"	29
4220D	20'	17'	17"	15 1/4"	14 3/4"	13 1/16"	37
4224D	24'	21'	17"	15 1/4"	14 3/4"	13 1/16"	44
4228D	28'	25'	17"	15 1/4"	14 3/4"	13 1/16"	50
4232D	32'	29'	18 1/2"	16 1/2"	15 7/8"	13 7/8"	69
4236D	36'	32'	18 1/2"	16 1/2"	15 7/8"	13 7/8"	78
4240D	40'	35'	18 1/2"	16 1/2"	15 7/8"	13 7/8"	86
4244D	44'	39'	18 1/2"	16 1/2"	15 7/8"	13 7/8"	94

#### TWO SECTION EXTENSION - ROUND RUNG

Part No.	Size	Maximum Extended Length	Base Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	
4216	16'	13'	17 1/16"	15 1/4"	14 5/8"	12 7/8"	28
4220	20'	17'	17 1/16"	15 1/4"	14 5/8"	12 7/8"	35
4224	24'	21'	17 1/16"	15 1/4"	14 5/8"	12 7/8"	42
4228	28'	25'	17 1/16"	15 1/4"	14 5/8"	12 7/8"	47
4232	32'	29'	17 1/16"	15 1/4"	14 5/8"	12 7/8"	53
4236	36'	32'	18 3/8"	16 1/4"	15 7/8"	14"	68
4240	40'	35'	18 3/8"	16 1/4"	15 7/8"	14"	77
4244	44'	39'	18 3/8"	16 1/4"	15 7/8"	14"	91

#### THREE SECTION EXTENSION - ROUND RUNG

Part No.	Size	Maximum Extended Length	Base Section		Middle Section		Fly Section		Approx. Weight (lbs)
			Outside Width	Inside Width	Outside Width	Inside Width	Outside Width	Inside Width	
4360	60'	50'	21 3/4"	19"	18 1/2"	16 1/2"	16"	14 1/8"	128

# Aluminum Ladders


## SERIES 1400

### LIGHT DUTY ALUMINUM STEP

Approved Grade 3 - 200 lbs Load Rating  
Meets or exceeds ANSI Type 3 - 200 lbs Load Rating  
**LIGHT WEIGHT PORTABILITY FOR EASY HOME USE**

- Serrated steps and side rails
- Self-folding pail tray
- 'J' shaped spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
1405	5'	56"	33"	20"	37"	10
1406	6'	67"	45"	21"	42"	12

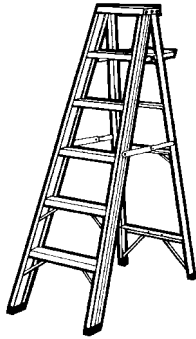


## SERIES 3600

### HEAVY DUTY ALUMINUM TWO-WAY STEP

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1 - 250 lbs Load Rating  
**DOUBLE FRONT CONSTRUCTION ALLOWS ACCESS FROM EITHER SIDE**

- 3" slip-resistant serrated steps and side rails
- Extra thick top brackets for greater stability
- 'J' shaped spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
3604	4'	44"	23"	19"	39"	14
3606	6'	68"	45"	21"	57"	21
3608	8'	90"	67"	24"	72"	29
3610	10'	112"	89"	26"	89"	36

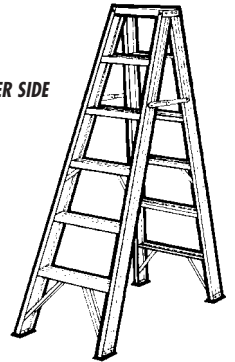


## SERIES 2400

### MEDIUM DUTY ALUMINUM STEP

Approved Grade 2 - 225 lbs Load Rating  
Meets or exceeds ANSI Type 2 - 225 lbs Load Rating  
**THE FINEST TRADESMAN STEP ON THE MARKET**

- Super tough moulded copolymer top
- Durable yet light weight extruded side rails
- 3" slip-resistant serrated steps
- Self-folding pail tray
- 'J' shaped spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
2402	2'	22"	11"	16"	20"	5
2403	3'	34"	23"	17"	25"	7
2404	4'	45"	24"	18"	31"	10
2405	5'	56"	34"	20"	38"	12
2406	6'	67"	45"	21"	44"	14
2407	7'	79"	56"	22"	50"	17
2408	8'	90"	67"	23"	56"	20
2410	10'	112"	90"	26"	70"	24

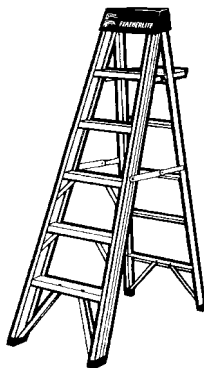


## SERIES 4400

### EXTRA-HEAVY DUTY ALUMINUM STEP

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1A - 300 lbs Load Rating  
**BUILT TO LAST IN ANY INDUSTRIAL APPLICATION**

- Extra-wide 3 1/2" slip-resistant serrated steps and side rails
- Exclusive solid triangular step braces provide unequalled rigidity
- Super tough moulded copolymer top
- Heavy duty hinged pail tray
- Inside spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
4404	4'	46"	24"	20"	29"	14
4406	6'	68"	46"	23"	41"	20
4408	8'	90"	68"	26"	54"	26
4410	10'	113"	91"	29"	66"	33
4412	12'	135"	114"	32"	78"	41
4414	14'	158"	134"	35"	88"	51
4416	16'	181"	160"	38"	102"	59

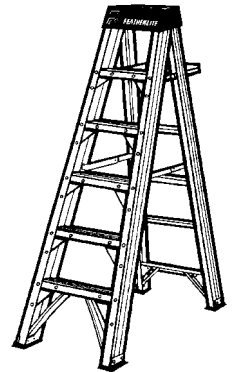


## SERIES 3400

### HEAVY DUTY ALUMINUM STEP

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1 - 250 lbs Load Rating  
**HIGH STRENGTH TO WEIGHT RATIO PROVIDES AN ECONOMICAL ALTERNATIVE FOR GENERAL CONTRACTOR WORK**

- 3" slip-resistant serrated steps and side rails
- Super tough moulded copolymer top
- Heavy duty hinged pail tray
- Inside spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
3404	4'	46"	24"	19"	30"	12
3405	5'	57"	34"	20"	35"	14
3406	6'	68"	46"	21"	41"	17
3408	8'	91"	68"	24"	54"	22
3410	10'	114"	91"	26"	67"	28

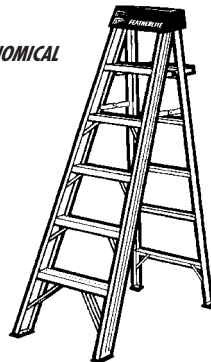


## SERIES 4500

### EXTRA-HEAVY DUTY ALUMINUM PLATFORM STEP

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1A - 300 lbs Load Rating  
**IDEAL FOR INDUSTRIAL FIXED HEIGHT WORK**

- Extra-wide 3 1/2" slip-resistant serrated steps and side rails
- Exclusive solid triangular step braces provide unequalled rigidity
- Slip-resistant serrated platform - 14" x 18"
- Inside spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
4506	6'	68"	46"	24"	42"	22
4508	8'	93"	69"	27"	54"	28
4510	10'	113"	92"	31"	65"	35
4512	12'	135"	115"	34"	78"	43
4514	14'	157"	136"	36"	87"	52
4516	16'	180"	158"	39"	102"	60

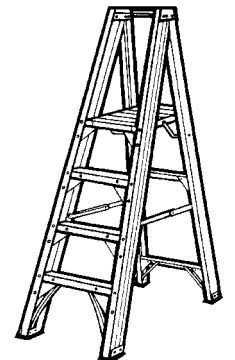


## SERIES 3500

### HEAVY DUTY ALUMINUM PLATFORM STEP

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1 - 250 lbs Load Rating  
**IDEAL FOR GENERAL FIXED HEIGHT WORK**

- 3" slip-resistant serrated steps and side rails
- Slip-resistant serrated platform - 14" x 18"
- Inside spreader arms
- Heavy duty rubber safety shoes

Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
3504	4'	46"	23"	21"	28"	13
3506	6'	68"	46"	24"	42"	19
3508	8'	90"	68"	26"	54"	24
3510	10'	114"	92"	29"	66"	30

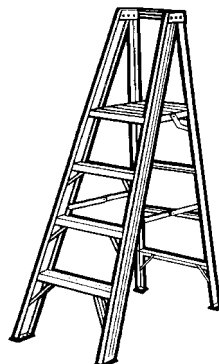

## SERIES 4600

### EXTRA-HEAVY DUTY ALUMINUM TWO-WAY STEP

Approved Grade 1 - 250 lbs Load Rating  
Meets or exceeds ANSI Type 1A - 300 lbs Load Rating  
**DOUBLE-FRONT CONSTRUCTION ALLOWS ACCESS FROM EITHER SIDE**

- Extra-wide 3 1/2" slip-resistant serrated steps and side rails
- Exclusive solid triangular step braces provide unequalled rigidity
- Extra-thick top brackets for greater stability
- 'J' shaped spreader arms
- Heavy duty rubber safety shoes


Part No.	Size	Open Height	Highest Safe Standing Height	Base Width	Base Depth	Approx. Weight (lbs)
4606	6'	67"	46"	23"	56"	25
4608	8'	90"	68"	26"	73"	32
4610	10'	112"	90"	29"	89"	41



*Their unique stabilizing system offers maximum stability.*

**HEAVY DUTY ROLLING SAFETY LADDERS**

These ladders are without a doubt the most solid and secure on the market. Each ladder comes with a compliance plate affixed and slip resistant steps and platform.

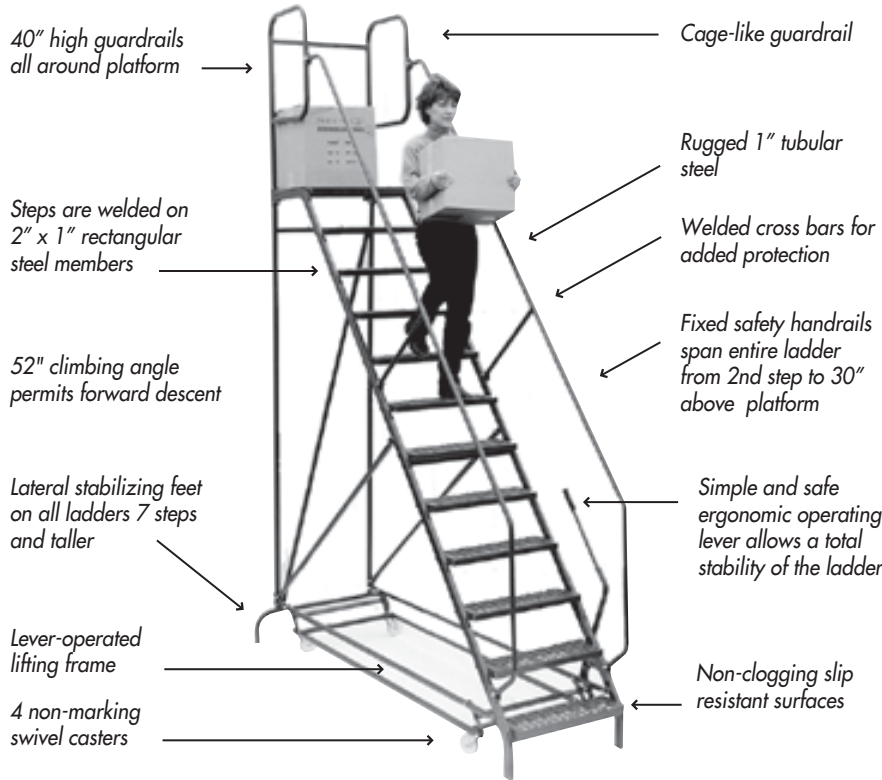

**MEETS OR EXCEEDS  
A.N.S.I. 14.7 &  
O.S.H.A 1920.29  
SAFETY REQUIREMENTS.  
COMPLIANCE PLATE  
AFFIXED TO EACH LADDER.**

- Optimal removable safety chains on back portion of guardrail are available.
- 20" deep platform on 8 to 14-step models and 13" deep on 3 to 7-step models.
- Steps and platform are made of 14 gauge steel, perforated and embossed.

**Rolling Ladders**



1573



**SPRING LOADED CASTERS MODELS - 24" WIDE**

MODEL	STEPS	HEIGHT		BASE		PLATFORM		WEIGHT (lbs.)
		platform	overall	width	depth	width	depth	
1572	2	18"	18"	26"	20"	24"	13"	25
1573	3	27"	27"	26"	27"	24"	13"	35
1574	4	36"	36"	26"	31"	24"	13"	40

**SPRING LOADED CASTERS MODELS - 18" WIDE**

MODEL	STEPS	HEIGHT		BASE		PLATFORM		WEIGHT (lbs.)
		platform	overall	width	depth	width	depth	
1570	1	11 1/2"	11 1/2"	18"	19"	16"	13"	10
1572-B	2	18"	18"	20"	20"	18"	13"	20
1573-B	3	27"	27"	20"	27"	18"	13"	25
1574-B	4	36"	36"	20"	31"	18"	13"	35

**HEAVY DUTY ROLLING SAFETY LADDERS - 28" or 36" WIDE**

MODEL	STEPS	HEIGHT		BASE		PLATFORM		WEIGHT (lbs.)
		platform	overall	width	depth	width	depth	
1573G	3	27"	67"	28"	30"	24"	13"	45
1574G	4	36"	76"	28"	36"	24"	13"	60
1575G	5	45"	85"	28"	43"	24"	13"	75
1576G	6	54"	94"	28"	50"	24"	13"	90
1577G	7	63"	103"	36"	56"	24"	13"	105
1578G	8	72"	112"	36"	70"	24"	20"	130
1579G	9	81"	121"	36"	77"	24"	20"	145
1580G	10	90"	130"	36"	82"	24"	20"	165
1581G	11	99"	139"	36"	89"	24"	20"	175
1582G	12	108"	148"	36"	95"	24"	20"	185
1583G	13	117"	157"	36"	102"	24"	20"	235
1584G	14	126"	166"	36"	108"	24"	20"	260
1586G	16	144"	184"	36"	128"	24"	20"	285

7 to 16-step ladders are shipped 'knock down' for freight savings. Ladders still roll on their casters for easy shipping and receiving.